

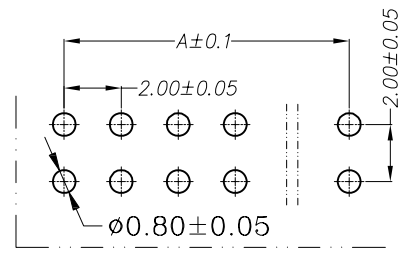
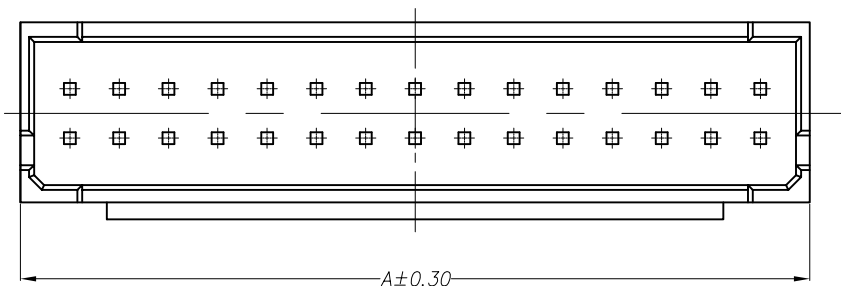
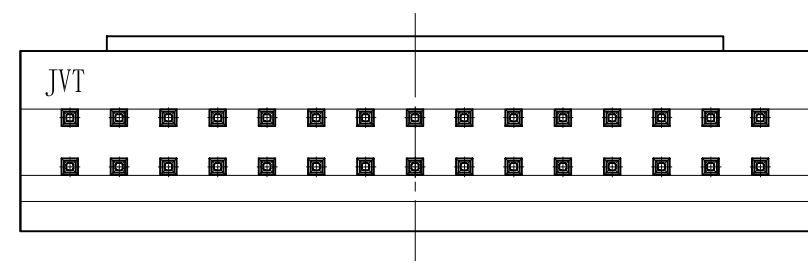


RoHS

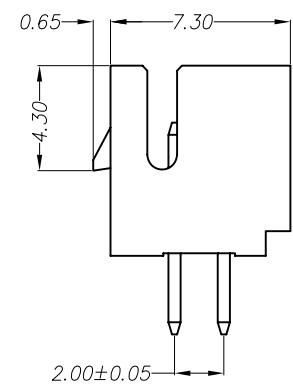

P.C.B LAYOUT

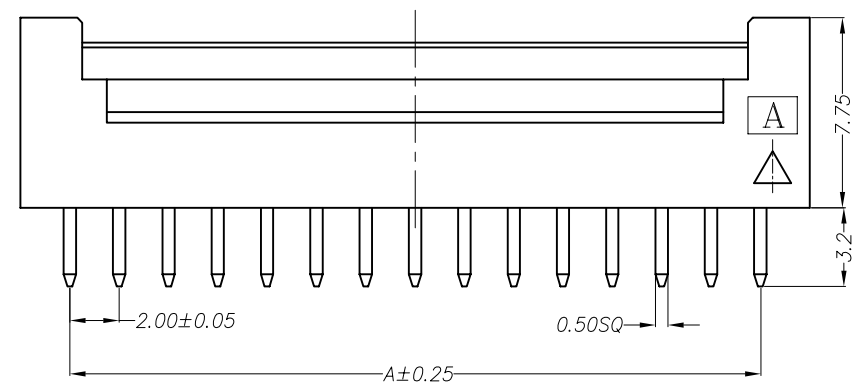


REVISION DATE		
ITEM	DESCRIPTION	DATE
A	Issue	

■ Specifications

- Voltage rating: 250V AC/ DC
- Current rating: 5A AC/ DC
- Withstanding Voltage: 1000V AC/minute.
- Insulation resistance: 1000MΩ Min.
- Temperature range: -25°C~+85°C
- Contact resistance: Initial Value/30mΩ Max.

■ Wafer

- Part No.: JVT2041W9T-XXSN-D
- Poles : 04-50
- Material: Nylon 9T UL 94V-0
Pin: Brass/Tin-Plated
- Q'ty: 1,000 Pcs/Bag

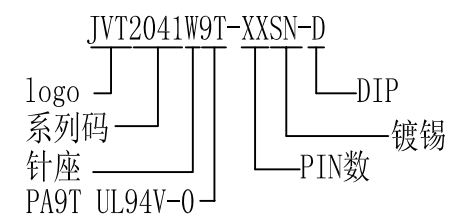

PIN	"A"	"B"	PIN	"A"	"B"
04PIN	2.00	6.00	28PIN	26.00	30.00
06PIN	4.00	8.00	30PIN	28.00	32.00
08PIN	6.00	10.00	32PIN	30.00	34.00
10PIN	8.00	12.00	34PIN	32.00	36.00
12PIN	10.00	14.00	36PIN	34.00	38.00
14PIN	12.00	16.00	38PIN	36.00	40.00
16PIN	14.00	18.00	40PIN	38.00	42.00
18PIN	16.00	20.00	42PIN	40.00	44.00
20PIN	18.00	22.00	44PIN	42.00	46.00
22PIN	20.00	24.00	46PIN	44.00	48.00
24PIN	22.00	26.00	48PIN	46.00	50.00
26PIN	24.00	28.00	50PIN	48.00	52.00

投影 (PROJECT)		公差 (TOLERANCE)	
单位 (UNIT)	mm	0	±0.50
比例 (SCALE)	FIT	0.0	±0.30
版本 (EDITION)	A	0.00	±0.20
日期 (DATE)	2014 07 26	0.000	±0.10

东莞市乔业电子有限公司
 DONG GUAN CHYAO YEE (JVT) CONNECTORS CO., LTD.

绘图 (DRAWN)	TONY
审核 (CHECKED)	CHEN
核准 (APPROVE)	

料号 (PART NO)	JVT2041W9T-XXSN-D	页次 (PAGE)	
图号 (DRAW NO)	031-2041-01		1/1
品名 (NAME)	PHB 2.0mm 180° WAFER DIP		