

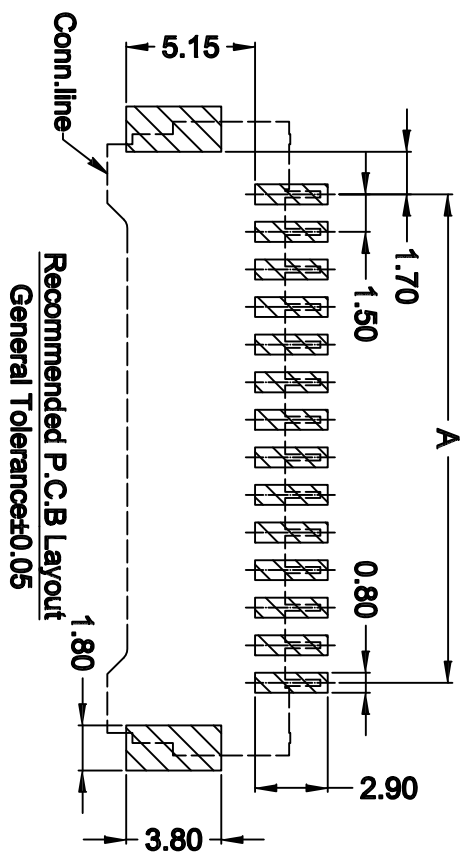
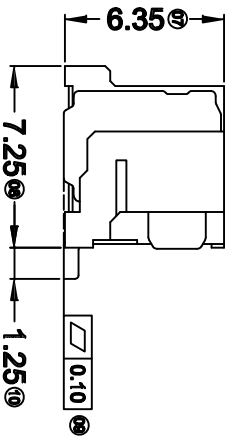
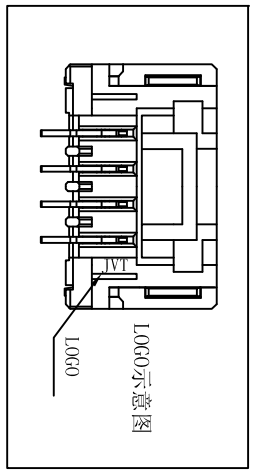
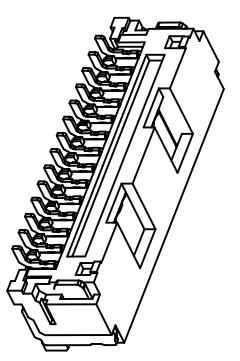


06P-15P Double Hole
Scale 1:1

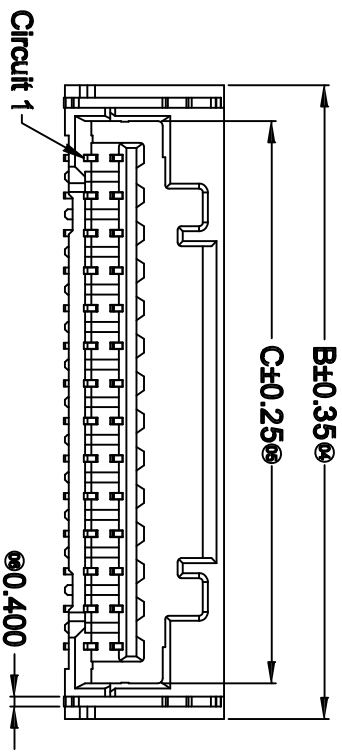


Recommended P.C.B Layout
General Tolerance±0.05

02P-05P Single Hole
Scale 1:1

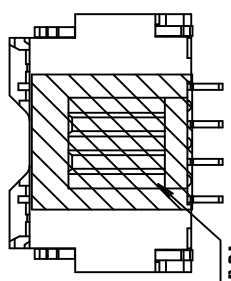

02-05P With
KAPTON TAPE

Poles	Dimensions (mm)			Poles	Dimensions (mm)		
	A	B	C		A	B	C
02	1.50	7.30	4.45	09	12.00	17.80	14.95
03	3.00	8.80	5.95	10	13.50	19.30	16.45
04	4.50	10.30	7.45	11	15.00	20.80	17.95
05	6.00	11.80	8.95	12	16.50	22.30	19.45
06	7.50	13.30	10.45	13	18.00	23.80	20.95
07	9.00	14.80	11.95	14	19.50	25.30	22.45
08	10.50	16.30	13.45	15	21.00	26.80	23.95

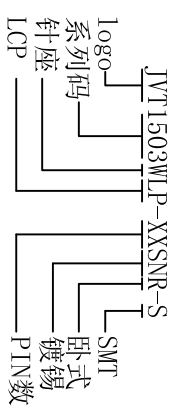

- SPECIFICATION**
- Voltage rating: 100V AC, DC
 - Current Rating: 2A, AC, DC
 - Withstand voltage: 500V AC/minute
 - Contact resistance: 20mΩ max
 - Insulation resistance: 500MΩ min
 - Temperature range: -45° C ~ +85° C
- WAFER**
- Material: Base, LCP UL94V-0
 - Contact area, Brass Tin-plated
 - Pin: Phosphor Bronze

GENERAL TOLERANCE	
0	±0.35
.0	±0.30
.00	±0.20
.000	±0.10

版本	A	变更内容	日期	单位	比例	日期	核准	审核	绘图	品名	料号	图名	版本
				mm	1:1	2013/12/03	CHEN	李勇军		MLX50287 1.5mm WAFER SMT 卧式	JVT1503WLP-XXSNR-S	054	A